

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G11B 19/02, 20/10, G10H 1/00	A1	(11) International Publication Number: WO 97/01168 (43) International Publication Date: 9 January 1997 (09.01.97)
(21) International Application Number: PCT/EP96/02637 (22) International Filing Date: 19 June 1996 (19.06.96) (30) Priority Data: 1799/95-0 20 June 1995 (20.06.95) CH (71)(72) Applicant and Inventor: RICKLI, André [CH/CH]; Lehmgrubenweg 18a, Postfach 316, CH-2504 Biel (CH). (74) Agent: BOVARD LTD.; Optingenstrasse 16, CH-3000 Berne 25 (CH).		(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>

(54) Title: **DIGITAL PROCESSING DEVICE FOR AUDIO SIGNAL**

(57) Abstract

A system for the digital processing of audio signals, particularly for disc jockeys and scratch musicians. The speed and direction of reproduction of an audio signal coming from an external source, e.g., from a CD player, can be controlled by acting manually on a rotating element (16). The speed of rotation of this element is normally constant but can be modified by the disc jockey. The sampled audio signal is stored at a constant frequency in a sampling buffer and read at a variable frequency as a function of the speed and direction of the rotating element. In one embodiment, the element (16) is a record player turntable. The disc jockey can act upon the speed of rotation. An optical sensor (21) determines the speed and direction of rotation of the turntable. These data are used to determine the speed and direction of reproduction of an external audio signal, e.g., coming from a CD player.

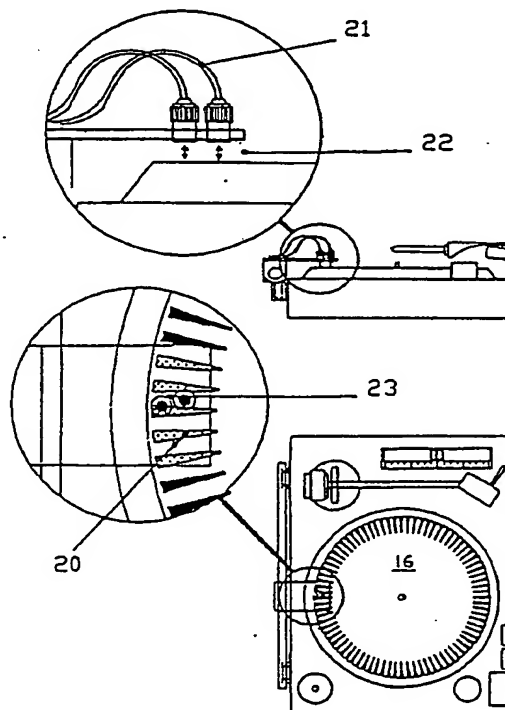

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

Digital Processing Device for Audio Signal

The present invention relates to a digital processing device for an audio signal.

At the beginning of the 1980's, disc jockeys developed a technique
5 for producing novel sounds which had, in their own way, a typical, unmistakable character, and which could not be produced in any other way : the so-called SCRATCHING. This is generally understood to mean the rhythmical interplay of forward and backward movements of a record being played, as well as the simultaneous modulation of the volume by means of a slide control. Scratching
10 is mixed in time with a piece being played for the purpose of mixing the scratched musical phrase at the original speed in the beat intervals of the piece being played at the right moment. At the end of the phrase, the record is inaudibly rotated back to the starting position of the phrase, and the procedure is repeated a number of times, the appeal being to modify the repetitions and to
15 produce musical suspense by continuously stepping up the tricks.

In recent years, scratching has become established as a generally acknowledged musical instrument and has been utilized in numerous music productions. More and more music groups are also using scratch musicians live.

20 However, the conventional method of using an analog record as the sound carrier has serious disadvantages, the elimination of which is the object of the present invention. For one thing, there is enormous wear and tear on material. Records wear out very quickly and must be replaced after a few hours of use ; and as digital compact discs come to take over more and more
25 from analog records, this leads to procurement problems. The consumption of needles is also enormous. The rapid changes of direction and speed produce centrifugal forces which lead to great distortions of the music signal and, when play is too fast, cause the needle to jump out of the current groove and put an abrupt end to the performance.

Moreover, this conventional method can be applied only with LP's. Increasingly, however, other sources of music are used, particularly digital sources such as CD's or tapes, the use of LP's tending to decline or even disappear.

5 Furthermore, conventional methods do not allow several musical phrases to be combined or played simultaneously ; the record must be repositioned for that.

According to the known prior art, so-called scratch aids exist for digital recording-and-playback apparatus (music samplers) in the form of
10 scratch discs, slide potentiometers, knobs, etc.

The decisive drawback of this kind of transcription is always the lack of a mechanically generated speed reference allowing an instantaneous changeover between manipulated and original reproduction. Since, besides scratching, there is also a demand for the possibility of immediate correction in
15 case of the premature or delayed start of a phrase which is supposed to run synchronously with a piece already playing, all respective apparatus offered thus far are hardly suitable. Changing at the touch of a button between manipulated speed and an electronically generated reference takes too long and is, moreover, so hard to control that attempts at error correction usually
20 end up to be the opposite. A practiced disc jockey synchronizes on record players by hand, inaudibly for the listener, in the first tenths of a second during the start of the phrase. In time, the disc jockey becomes quite familiar with this procedure, and it takes place fully automatically, so that he can concentrate entirely on the remix. All attempts at being able to reproduce electronically this
25 complex function which the human brain takes care of autonomously are doomed to failure from the outset.

The object of the invention is to propose a device which avoids the drawbacks of the prior art.

This object is achieved especially thanks to the novel elements of
30 claim 1. In particular, this object is achieved thanks to a reference generated

mechanically and making it possible to pass instantly from normal reproduction to manipulated reproduction.

Furthermore, this object is achieved thanks to an element which moves during the reproduction of said audio signal, the speed and the direction
5 of reproduction of said audio signal being manually controllable by control of the speed and direction of said element.

Since the users of such apparatus usually already have record players on hand, and the necessary manual skill is already well practiced, it makes good sense to use a record player as moving element. However, for
10 novices or for portable apparatus, the invention can be realized using any other kind of moving element, for instance a running belt or a rotating knob or control button on the front panel of an audiomixer.

The invention will be better understood with the aid of the description and the accompanying drawings, in which :

15 Figure 1A is a front elevation of a first embodiment of the invention wherein the movable element, the speed and direction of which can be controlled, is made up of a record-player turntable ;

Figure 1B is a top plan view of this embodiment ;

Figure 1C is an elevation of this embodiment with the incremental
20 measuring system in lifted position ;

Figure 2A is an elevation of a second embodiment of the invention likewise applied to a record player, wherein the speed of the turntable is measured optically ;

Figure 2B is an enlarged view of the optical sensors of Figure 2A ;

25 Figure 2C is a top plan view of the device of Figure 2A ;

Figure 2D is an enlarged view of the optical marking on the turntable of Figure 2C ;

Figure 3A is a top plan view of a third embodiment of the invention, likewise applied to a record player, wherein the speed of the turntable is
5 measured by means of a Hall sensor ;

Figure 3B is an enlarged view of the Hall sensor of Figure 3A ;

Figure 4A is a fourth embodiment of the invention wherein the movable element is a belt driven by an electric motor via a slide coupling; and

Figure 4B is an elevation of the embodiment of Figure 4A.

10 Figures 1A-1C illustrate a first embodiment of the invention. This embodiment has the advantage of using a conventional record player 18 as the manually controllable movable element. This device can therefore be used by a disc jockey without excessive difficulty of adaptation.

By means of a transmission belt 12, a disc 16 drives an incremental
15 measuring system 11 available on the technical market under the name of incremental decoder or angle encoder. When the disc rotates, pulses occurring after predetermined intervals of time are used directly as the sampling pulse for the recording and playback of the digital music recording. During recording, each pulse triggers a measurement of the analog music
20 signal from an external source, e.g., from a CD player, and enters the result as a numerical value in a storage position of a dynamic computer memory (not shown). Here the individual measurements lie one directly behind the other in the memory. It is to be heeded that the measuring system is a high-definition one. If satisfactory quality of the music reproduction is to be achieved, the
25 sampling rate should yield 40,000 measurements per second. At the normal rotation time of a record (speed of rotation 33.33 rpm) of 1.8 seconds, the measuring system must be capable of handling 72,000 pulses per rotation, or 18 angular seconds. During playback, the direction of rotation is evaluated in addition. Upon arrival of a pulse, the following and/or preceding storage

position is converted, depending on the the direction of rotation, from digital to analog.

The software addressing the computer memory can thereafter be as sophisticated as desired ; as a minimum, however, it must check the
5 addressing of the computer memory present for overflows ; if, during recording or forward playback, the pointer reaches the end address of the memory provided, the pointer is to be set at the starting address of the memory provided, or at the end address in the case of backward play and reaching the starting address, respectively. It is thereby achieved that if the maximum
10 available recording time is exceeded, the oldest recording is overwritten, which represents approximately the same mechanism as an endless tape loop in an analog echo apparatus.

According to current standard requirements for digital music reproduction, the signal should be digitalized with 16-bit width and be two-
15 channel, i.e., stereo. The result is a memory requirement of $16 \times 2 \times 40,000 = 1,280,000$ bits or 160,000 bytes per second. Since the sampling rate during playback can reach high frequencies of up to 1 MHz owing to scratching and rapid positioning of the disc, this circumstance is to be taken into account in dimensioning the computer control, software, and measuring system, otherwise
20 the system loses the momentary playback positions and is not playable.

Since the turntable 15 of the record player is supposed to keep rotating at undiminished speed when the disc is moved, particular attention must be given to the record support : the balance between sliding and adhering to the record player should be ensured. In tests, a combination of
25 PTFE-coated parchment 14 and very thin cellulose nonwoven 17 has proved best. The parchment should be cemented to the rubber mat 15 of the record player with a non-hardening adhesive spray in order to prevent wrinkling of the parchment over time.

Figures 2A-2D illustrate a second embodiment of the invention,
30 likewise applied to a record player. The turntable 16 of the record player comprises a pattern—in this example a pattern of alternating black 20 and

white 23 marks. Two optical sensors 21 placed a short distance 22 above the turntable supply to a processing unit (not shown) a signal determined by the color of the mark just below each sensor. As a function of the signals supplied by the two optical sensors 21, the processing unit then determines the speed of rotation of the turntable of the record player. Two shifted optical sensors are
5 necessary for determining the direction of rotation as well.

An analog audio signal coming from an external source, e.g., a CD player or a microphone, is then sampled at a frequency determined by the speed of rotation of the turntable.

10 A number of marks sufficient for obtaining the necessary resolution must be provided. To avoid the marks being too fine, interpolation of the signal coming from the sensors is preferable. Any type of optical sensor 21 may be provided, e.g., also a sensor using an optical fiber transporting a light beam collimated by a lens on the turntable. In a modification, it is also possible to use
15 known marble sensors to determine the speed of the element 16.

This embodiment having an optical sensor, however, presents the drawback of being sensitive to dust and debris on the turntable.

Figures 3A and 3B illustrate another embodiment of the invention which is advantageous from this point of view. The speed of the turntable 16 of the record player is measured by means of a fixed magnetoinductive sensor 31
20 co-operating with a serrated ferromagnetic ring 30 on the turntable of the record player.

The invention is obviously not limited to this type of sensor, and any sensor or known device permitting the speed and direction of rotation of the turntable to be determined may also be used. Hall-effect sensors may thus be
25 used advantageously. Likewise, it is possible to place upon the turntable 16 a magnetic film on which increments read by a stationary magnetic head are recorded.

All the preceding embodiments relate to devices adapted to conventional record players. However, the turntable 16 of the record player is used by the disc jockey only as a manipulatable element to control the speed of reproduction of an external audio source (not shown).

5 Figures 4A and 4B illustrate an embodiment of the invention in which no record player is used.

A controllable servomotor 40 drives a cylinder 42 via a slide coupling 41. A second cylinder 43 connected to the measuring system 44 is driven by the first cylinder 42 by means of a wide belt 45.

10 The disc jockey can manipulate and move the belt 45 by means of a handle 46 and thus act upon the speed and direction of rotation of the second cylinder 43. The measuring system 44 uses these parameters to determine the speed of reproduction of an audio signal coming from an external source.

15 It will be noted that—as in the preceding embodiments using a record player—this device permits normal sound reproduction when the disc jockey does not act upon the movable element 45, the second cylinder being driven in this case at a normal speed by the servomotor 40.

20 Other embodiments and modifications also making it possible to pass easily from a normal speed of movement of an element to a manipulated speed may readily be imagined and applied in devices making it possible to pass quickly from a normal playback speed of an audio signal to a manipulated speed.

The electronic part of the device comprises a sampling buffer.

25 In a first modification, the analog signal coming from a conventional analog source, for instance a microphone, is sampled at a constant frequency and stored in the sampling buffer. If the data are available in digital form, they can obviously also be stored directly in the buffer. For playback, the samples stored in the buffer are read successively at each reading pulse, the frequency

of the reading pulses depending on the speed of the movable element (16, 45). The samples read are then converted into analog signals by a digital-to-analog converter and reproduced.

In a second modification, the samples are stored in the sampling buffer at a
5 speed inversely proportional to the speed of movement of the movable element (16 ; 45) and are read at a constant speed.

Claims

1. A digital processing device for an audio signal, comprising at least one element (16 ; 45) which moves during the reproduction of said audio signal, the speed and the direction of reproduction of said audio signal being manually controllable by control of the speed and direction of said element.
5
2. A digital processing device according to claim 1, wherein said element (16) is a rotating element.
3. A digital processing device according to claim 1, wherein said element (16 ; 45) is driven by an electric motor, the driving direction and speed
10 being normally constant but capable of being manipulated manually by acting directly upon said element.
4. A digital processing device according to claim 3, further comprising at least one sensor (11 ; 21 ; 31 ; 44) permitting the speed and direction of movement of said element (16 ; 45) to be determined, the audio
15 signal coming from an external source, and the speed and the direction of reproduction of said audio signal being a function of the data coming from said sensor or sensors.
5. A digital processing device according to claim 4, further comprising a visual pattern (20, 23) joined to said element (16 ; 45), said
20 sensor or sensors (11 ; 21 ; 44) being stationary whereas said element (16 ; 45) is movable, said sensor or sensors being of the optical type.
6. A digital processing device according to claim 5, wherein said sensor is of the marble type.
7. A digital processing device according to claim 4, wherein said
25 sensor or sensors (31) are of the magnetoinductive type.
8. A digital processing device according to claim 4, further comprising a magnetic film joined to said element (16 ; 45) and storing

increments, said sensor (11 ; 21 ; 44) being stationary whereas said element (16 ; 45) is movable, said sensor or sensors being of the magnetic type and being disposed so as to read said increments stored on said film.

9. A digital processing device according to one of the claims 4-8,
5 wherein said element is made up of a record player turntable (16).

10.A digital processing device according to one of the claims 4-8,
wherein said element (45) is driven by an electric motor via a slide coupling
(41);

11.A digital processing device according to claim 1 or 2, further
10 comprising :
a sampling buffer,
sampling pulse generating means capable of generating
sampling pulses at a rate which is a function of the speed of movement of said
element,
15 sample and store means for sampling and storing samples of said
audio signal in said sampling buffer at each sampling pulse, and
reading means for reading samples out of said sampling buffer at
a constant rate.

12.A digital processing device according to claim 1 or 2, further
20 comprising :
a sampling buffer,
sampling pulse generating means capable of generating sampling
pulses at a constant rate which is a function of the speed of movement of said
element,
25 sample and store means for sampling and storing samples of said
audio signal in said sampling buffer at each sampling pulse, and
reading means for reading samples out of said sampling buffer at
a rate which is a function of the speed of movement of said element.

1 / 4

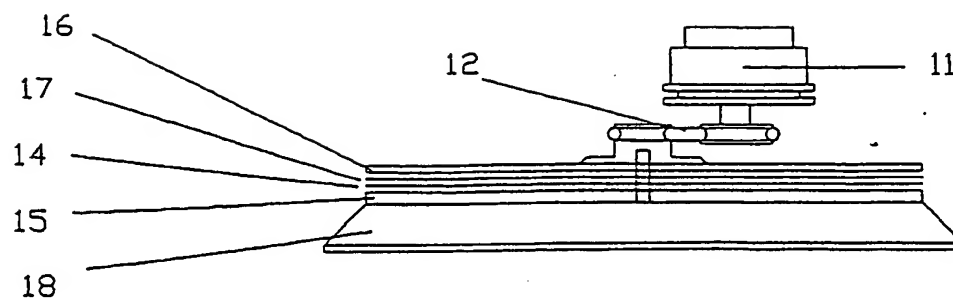


Fig. 1A

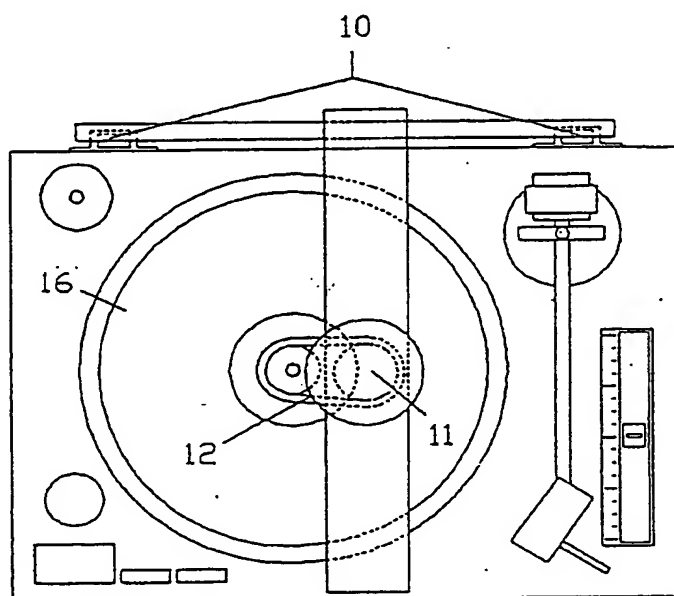


Fig. 1B

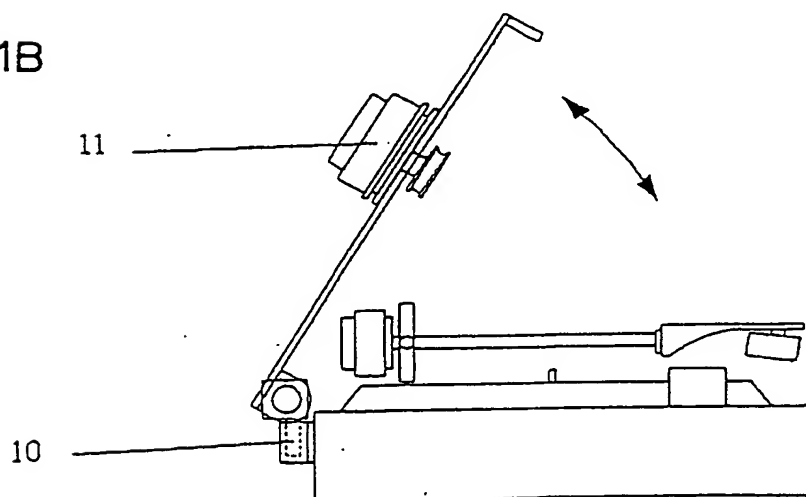


Fig. 1C

2 / 4

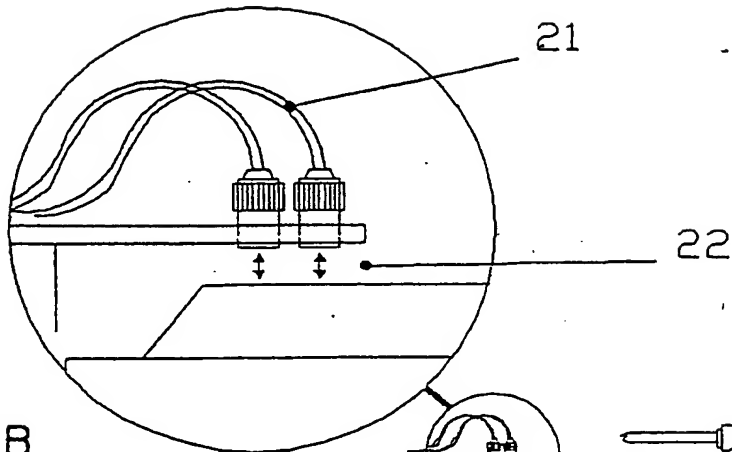


Fig. 2B

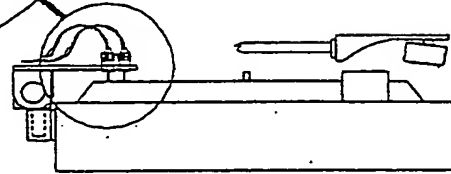


Fig. 2A

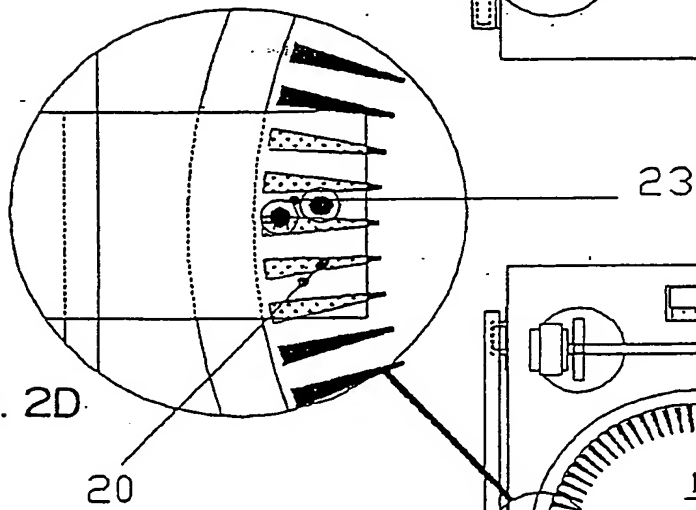


Fig. 2D

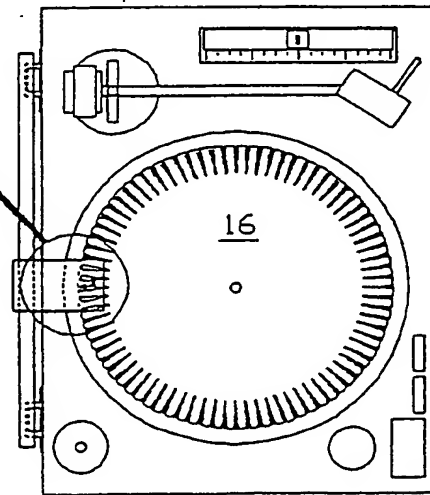


Fig. 2C

3 / 4

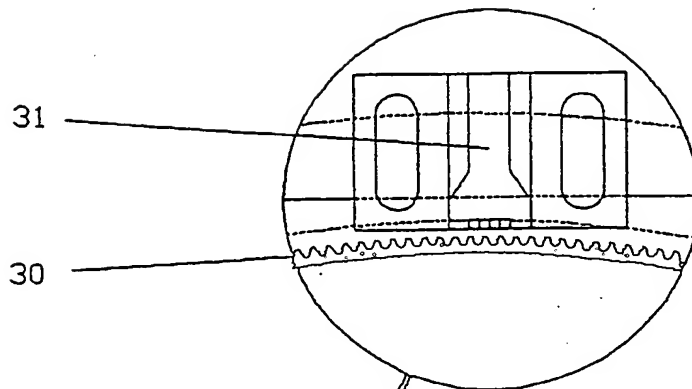


Fig. 3B



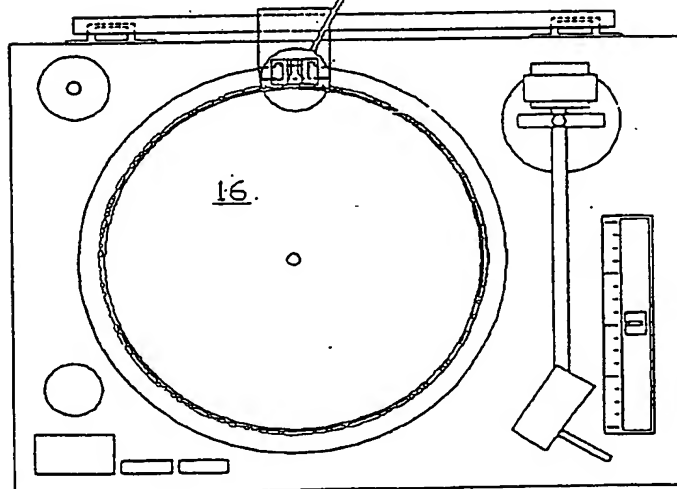


Fig. 3A

4 / 4

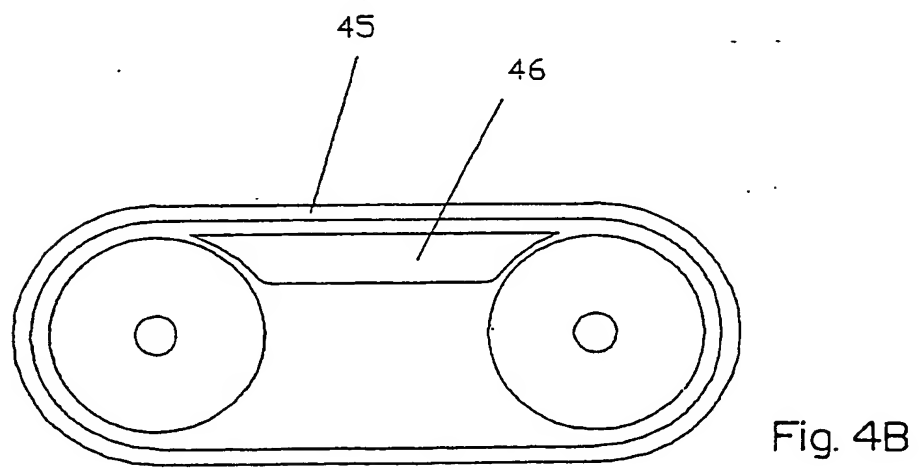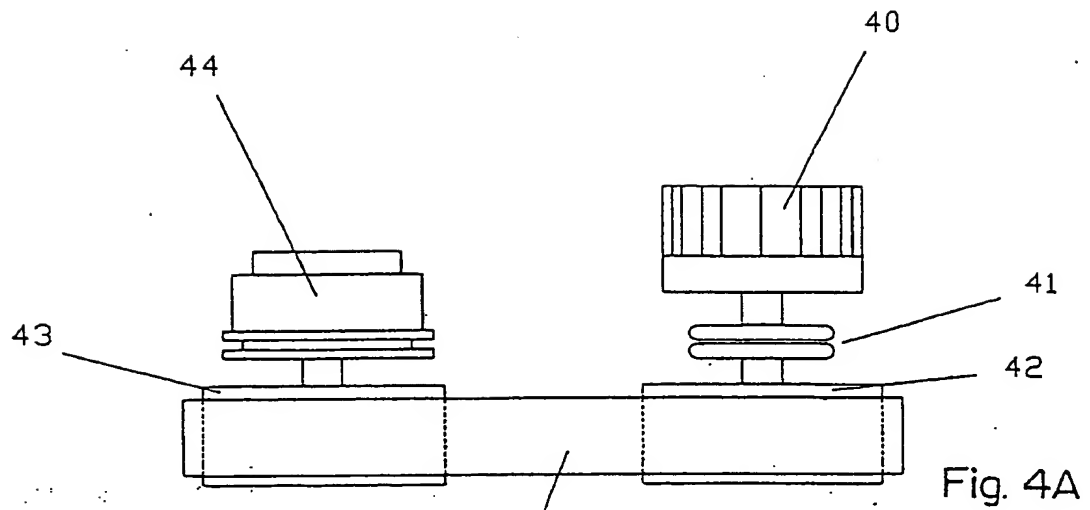

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 96/02637

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 G11B19/02 G11B20/10 G10H1/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 G11B G10H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 018, no. 353 (P-1764), 4 July 1994 & JP,A,06 089501 (CASIO COMPUT CO LTD), 29 March 1994, see abstract	1-4, 11, 12
A	---	5-9
X	US,A,5 350 882 (KOGUCHI SATORU ET AL) 27 September 1994 see column 1, line 65 - column 3, line 8 see column 5, line 15 - column 6, line 65 see column 15, line 55 - column 17, line 3 see column 19, line 49 - column 19, line 68 see figures 1,9-16,18 --- -/-	1-5, 7-12

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

& document member of the same patent family

Date of the actual completion of the international search

16 September 1996

Date of mailing of the international search report

26.09.96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Td. (+31-70) 340-2040, Tx. 31 651 epo nl.
Fax (+31-70) 340-3016

Authorized officer .

Benfield, A

INTERNATIONAL SEARCH REPORT

Inter. Application No
PCT/EP 96/02637

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 017, no. 658 (P-1654), 6 December 1993 & JP,A,05 216476 (YAMAHA CORP), 27 August 1993,-	1
A	see abstract	11,12
A	EP,A,0 577 104 (ROCKWELL INTERNATIONAL CORP) 5 January 1994 see the whole document	5
P,X	US,A,5 512 704 (ADACHI JUN) 30 April 1996 see the whole document	1-4,11, 12
A	US,A,5 245 663 (GREEN OMAR) 14 September 1993	
P,A	US,A,5 509 079 (GREEN OMAR M) 16 April 1996	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 96/02637

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A-5350882	27-09-94	JP-A- 5158480 JP-A- 5158481 JP-A- 5158475	25-06-93 25-06-93 25-06-93
EP-A-0577104	05-01-94	US-A- 5336884 JP-A- 6103688 US-A- 5451776	09-08-94 15-04-94 19-09-95
US-A-5512704	30-04-96	JP-A- 6124091	06-05-94
US-A-5245663	14-09-93	WO-A- 9324994 US-A- 5509079	09-12-93 16-04-96
US-A-5509079	16-04-96	US-A- 5245663 WO-A- 9324994	14-09-93 09-12-93